



# F160-XD series

In line medium pressure filters



## Technical Information

Housing

**Pressure: Max working** 160 bar (2300 psi) (acc. to NFPA T 3.10.5.1)  
**Burst** 480 bar (6900 psi) (acc. to NFPA T 3.10.5.1)

**Connection Ports:** 1/2" ÷ 1 1/2" BSP (other thread options on request)

**Materials:** Head: cast iron  
Bowl: aluminium alloy  
Seal: Buna-N (FKM on request)

**By-pass:** No by-pass or 6 bar (90 psi) setting

Element

**Filter Media:** Microglass fiber 4,5 - 7 - 12 - 18 - 27  $\mu\text{m}_{(c)}$  (acc. to ISO 16889)  
Cellulose 10  $\mu\text{m}_{(c)}$  (acc. to ISO 16889)

**Differential collapse pressure:**  
21 bar (300 psi) or 210 bar (3000 psi) (acc. to ISO 2941)

Filtrec elements are tested also according to ISO 2942 and ISO 23181

Common

**Working temperature:** -25°C +120°C (-13°F +248°F)

**Fluid compatibility** (acc. to ISO 2943):  
Full with HH-HL-HM-HV (acc. to ISO 6743/4).  
For use with other fluid applications please contact Filtrec Customer Service (info@filtrec.it).

## Ordering information

MEDIA	
000	no element
G03	microglass fiber $\beta_{4,5 \mu\text{m} (c)} \geq 1000$
G06	microglass fiber $\beta_{7 \mu\text{m} (c)} \geq 1000$
G10	microglass fiber $\beta_{12 \mu\text{m} (c)} \geq 1000$
G15	microglass fiber $\beta_{18 \mu\text{m} (c)} \geq 1000$
G25	microglass fiber $\beta_{27 \mu\text{m} (c)} \geq 1000$
*C10	cellulose $\beta_{10 \mu\text{m} (c)} \geq 2$

\*Only for  $\Delta p$  21 bar (300 psi)

	NOMINAL SIZE	MEDIA	ELEMENT COLLAPSE	SEALS	CONNECTION	BY-PASS	INDICATOR PORT OPTION	INDICATOR
<b>Filter assembly</b> <b>F160-XD</b>	<b>100</b>	<b>G10</b>	<b>A</b>	<b>V</b>	<b>B3</b>	<b>D</b>	<b>S</b>	<b>Z31</b>
<b>Filter element</b> <b>XD</b>	<b>100</b>	<b>G10</b>	<b>A</b>	<b>V</b>				

ELEMENT COLLAPSE	
A	21 bar / 300 psi
*B	210 bar / 3000 psi

\* recommended with no by-pass option.

SEALS	
B	NBR
V	FKM

CONNECTION	
B3	1/2" BSP
B4	3/4" BSP
B5	1" BSP
B6	1 1/4" BSP
B7	1 1/2" BSP

For different thread option please check availability with Filtrec Customer Service.

BY-PASS	
0	no by-pass
D	6 bar / 90 psi




INDICATOR PORT OPTION	
*0	no indicator port
S	indicator port with plug
*T	indicator port on the right side with plug

\* Optional, please check availability with Filtrec Customer Service.

INDICATOR	
000	no indicator
Z30	differential visual 5 bar/ 70 psi
Z31	differential electrical visual 5 bar/ 70 psi
Z32	differential visual 8 bar/ 120 psi
Z33	differential electrical visual 8 bar/ 120 psi

TO BE USED WITH NO BY-PASS OPTION ONLY

# Overall dimensions

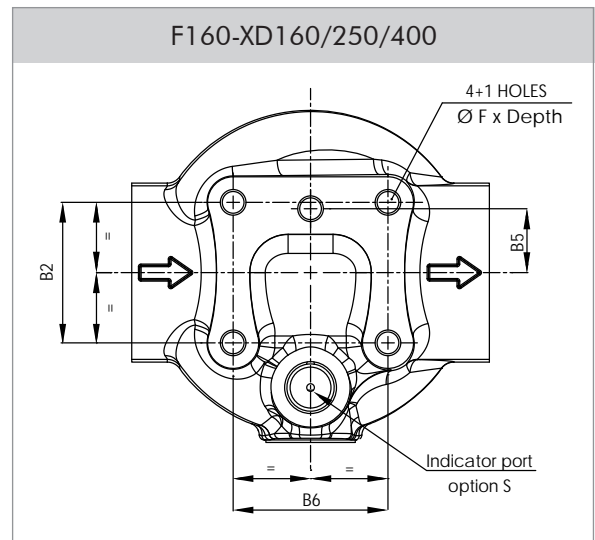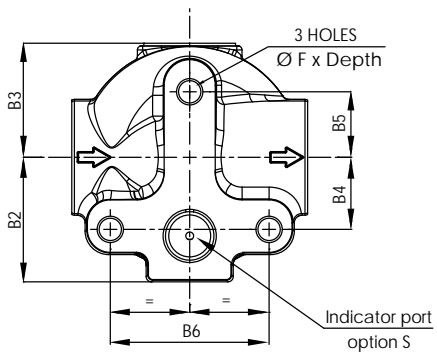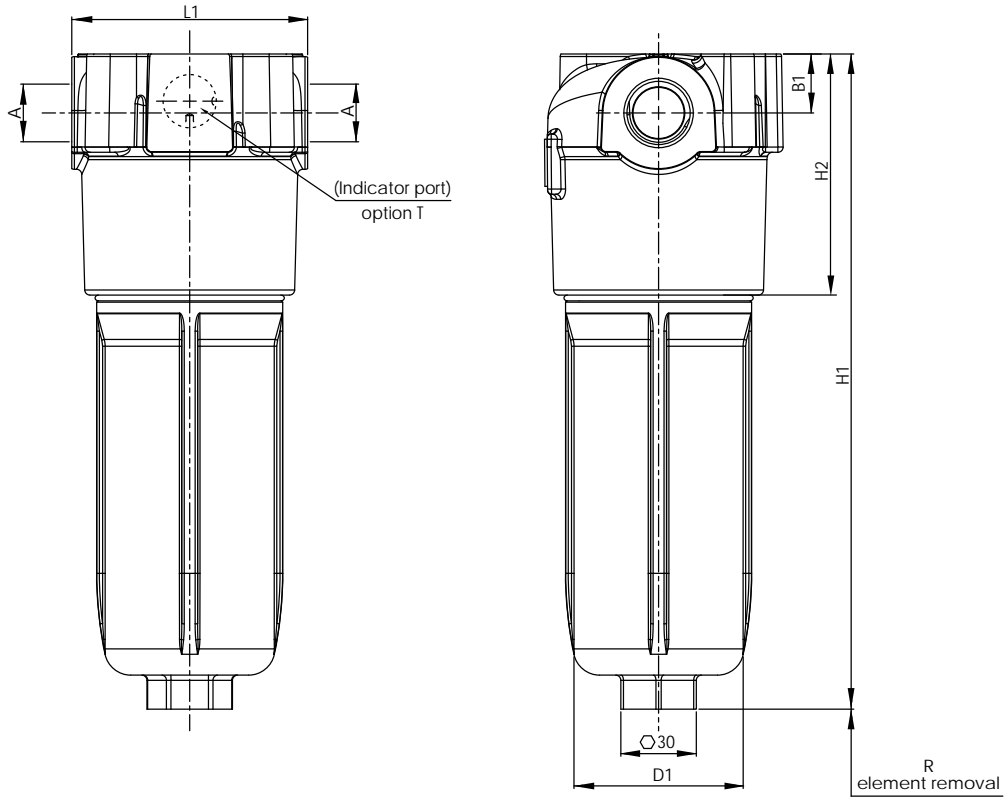

## Nominal size

CODE	A	B1	B2	B3	B4	B5	B6	D1	F	H1	H2	L1	R	WEIGHT
F160-XD040	1/2" BSP	22,5	47,5	43,5	27,5	25	60,6	65	M10x15	180	92	90	110	2,4 Kg
F160-XD063	3/4" BSP									250				2,6 Kg
F160-XD100	1" BSP									329				2,8 Kg
F160-XD160	1 1/4" BSP	40	55	---	---			110		289	129	140	130	6,6 Kg
F160-XD250	1 1/2" BSP									361				7 Kg
F160-XD400										514				10 Kg

For different thread options please contact Filtrac Customer Service.

## Pressure drop diagrams

The total Pressure Drop ( $\Delta p$ ) value is obtained by adding the  $\Delta p$  values of filter housing and filter element at the given flow rate. This ideally should not exceed 1,0 bar (14,5 psi) and should never exceed 1/3 of the set value of the by-pass valve.


### PRESSURE DROP THROUGH THE FILTER HOUSING

The Pressure Drop through the filter housing is governed by the port, not the bowl length and the oil viscosity.


### PRESSURE DROP THROUGH THE CLEAN FILTER ELEMENT

The Pressure Drop through the filter element is related both to the internal diameter of the filter element and to the filter media; this value is affected by the oil viscosity in a roughly proportional way: e.g. when the  $D_p$  value from the curve is 0,2 bar and a 46 cSt oil is used, the corresponding value is 0,31 ( $=0,2 \times 46/30$ ) bar.


### Housing F160-XD040/063/100

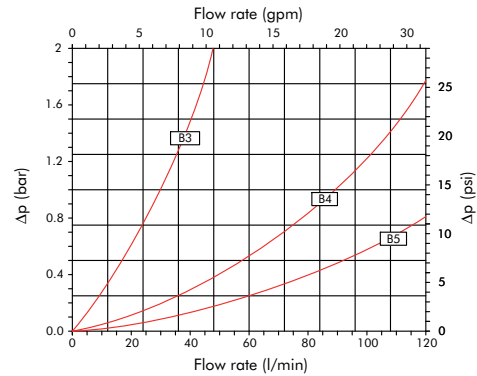


### Element XD040--A

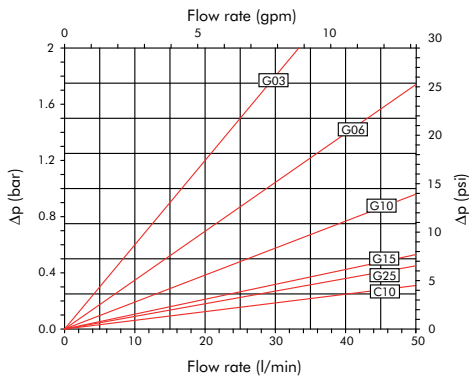


### Element XD040--B

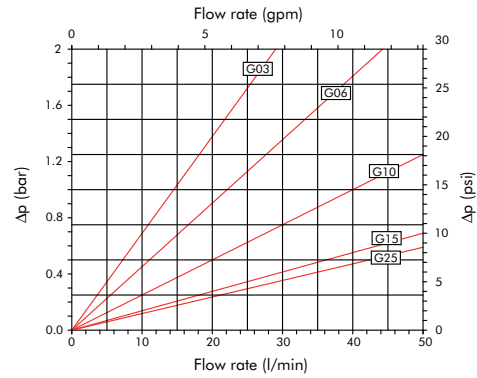


### Element XD063--A

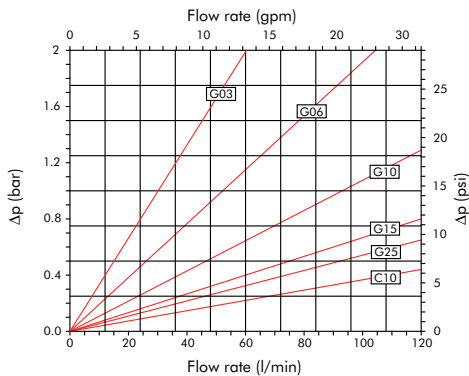


### Element XD063--B

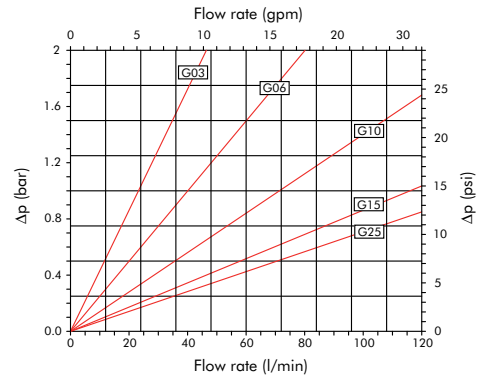

### Element XD100--A

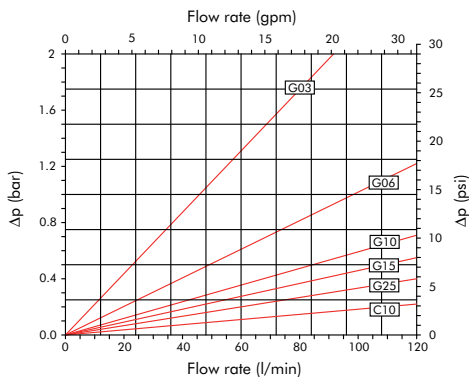

### Element XD100--B

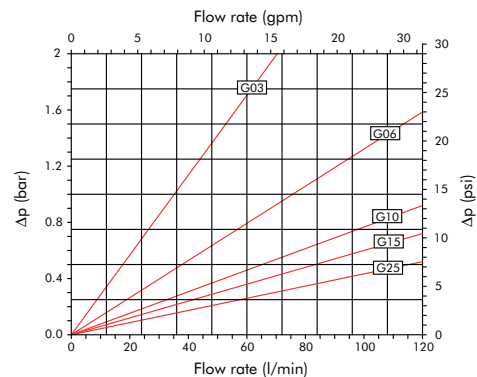

## Pressure drop diagrams

The total Pressure Drop ( $\Delta p$ ) value is obtained by adding the  $\Delta p$  values of filter housing and filter element at the given flow rate. This ideally should not exceed 1,0 bar (14,5 psi) and should never exceed 1/3 of the set value of the by-pass valve.


### PRESSURE DROP THROUGH THE FILTER HOUSING

The Pressure Drop through the filter housing is governed by the port, not the bowl length and the oil viscosity.


### PRESSURE DROP THROUGH THE CLEAN FILTER ELEMENT

The Pressure Drop through the filter element is related both to the internal diameter of the filter element and to the filter media; this value is affected by the oil viscosity in a roughly proportional way: e.g. when the  $D_p$  value from the curve is 0,2 bar and a 46 cSt oil is used, the corresponding value is 0,31 ( $=0,2 \times 46/30$ ) bar.


### Housing F160-XD160/250/400

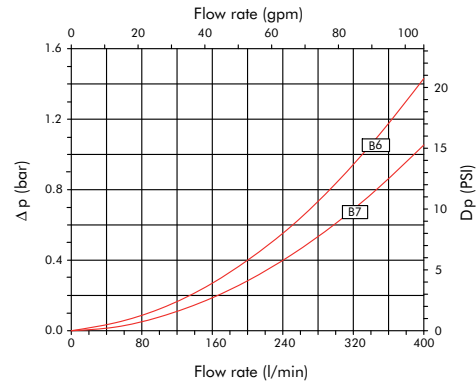


### Element XD160--A

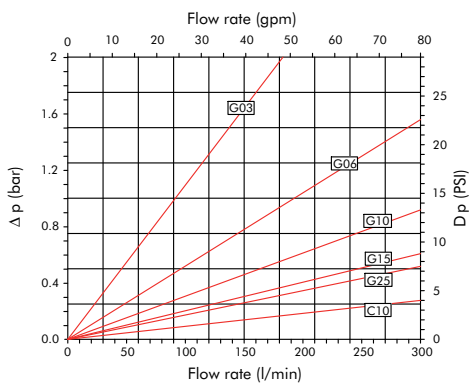


### Element XD160--B

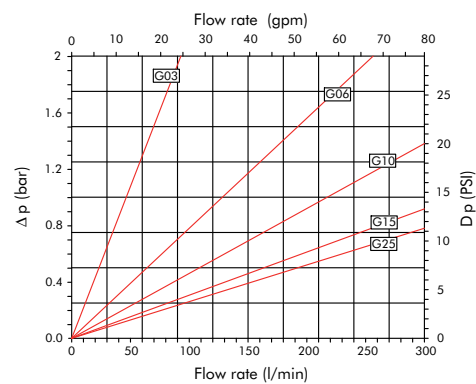


### Element XD250--A

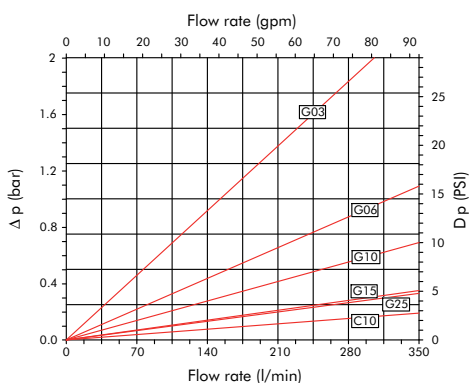


### Element XD250--B

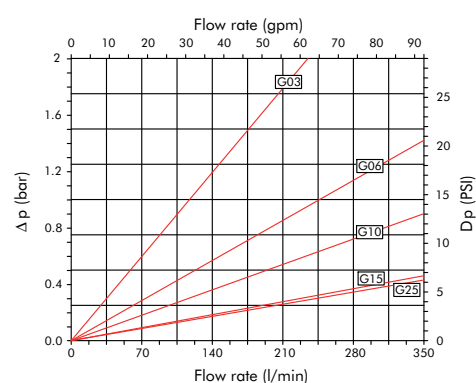

### Element XD400--A

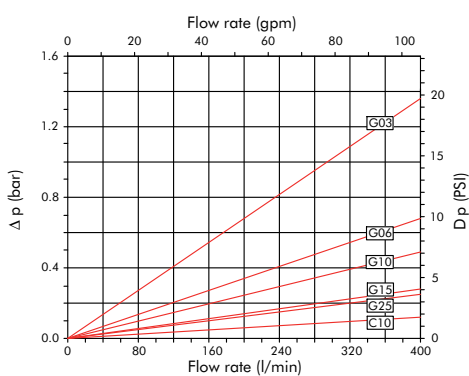

### Element XD400--B

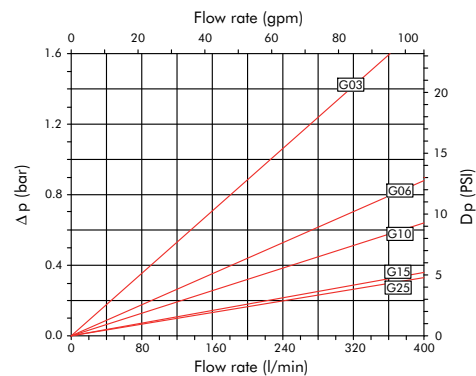


## Pressure drop diagrams


### PRESSURE DROP THROUGH THE BY-PASS VALVE

The by-pass valve is a safety device to prevent element collapse in case of differential pressure peaks due to flow peaks, cold start conditions or when the clogged element is not replaced in a timely manner.

### By-pass F160-XD040/063/100

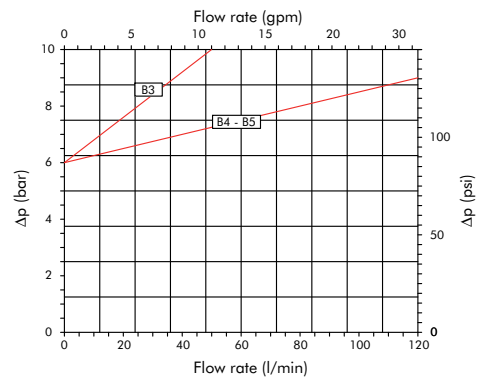

### By-pass F160-XD160/250/400

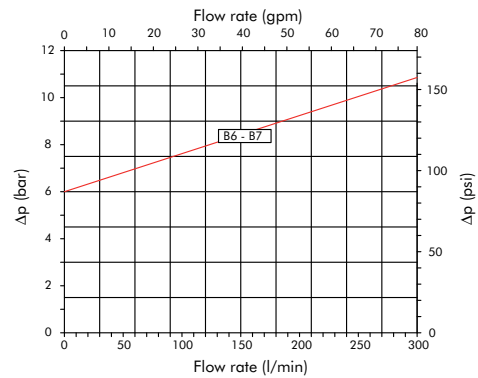

The above diagrams have been obtained at the FILTREC laboratory, according to the ISO 3968 specification, with mineral oil having 30 cSt viscosity and 0,86 Kg/dm<sup>3</sup> density.

In case of discrepancy, please check contamination level, viscosity and features of the oil in use and the sampling points of the differential pressure.

## Clogging indicator

The Pressure Drop ( $\Delta p$ ) through the filter increases during the system operation due to the contaminant retained by the filter element.

The filter element must be replaced when the indicator shows an alarm and before the  $\Delta p$  reaches the by-pass value setting.

N.B. in cold start conditions a false alarm can be caused by higher oil viscosity due to low temperature; the indicator alarm must be considered at normal working temperature only.


The differential clogging indicator registers the pressure upstream and downstream the filter element and activates a signal when the differential pressure reaches the set value:

- in the VISUAL indicator the signal is given by a green sector switching into red.
- in the ELECTRIC VISUAL indicator, further to the green to red visual indication, an electrical switch is activated.


N.B. the set value of the clogging indicator must always be lower than the set value of the by-pass valve.



### DIFFERENTIAL VISUAL



#### SYMBOL




CODE	SETTING
Z30	5 bar (70 psi)
Z32	8 bar (120 psi)

Visual indicator:


- GREEN: clean element
- RED: dirty element



### DIFFERENTIAL ELECTRIC VISUAL

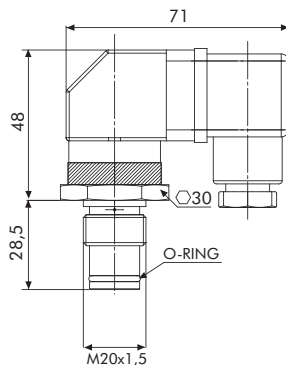


#### SYMBOL



CODE	SETTING
Z31	5 bar (70 psi)
Z33	8 bar (120 psi)

- Visual indicator:
  - GREEN: clean element
  - RED: dirty element
- Electric plug connection as per DIN 43650
- Protection: IP65 acc. to DIN 40050
- Max current: 5A resistive 1A inductive
- Max voltage: 250V AC - 30V DC

## User Tips

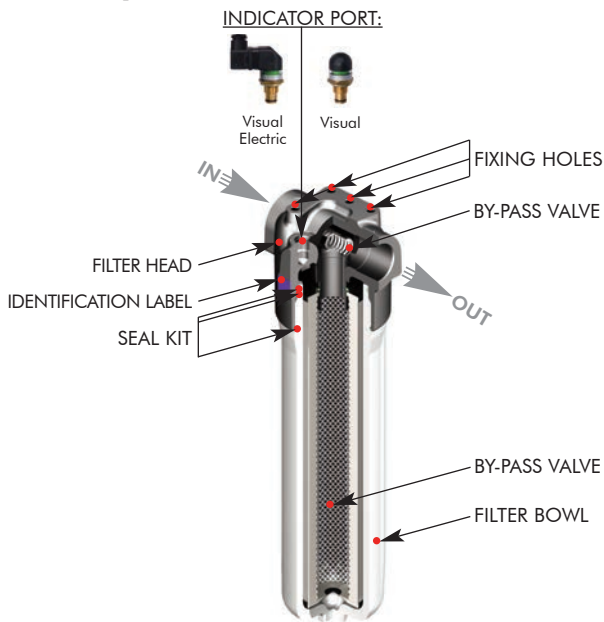

SPARE SEAL KIT PART NUMBER		
	NBR	FKM
F160-XD040/063/100	06.021.00090	06.021.00135
F160-XD160/250/400	06.021.00096	06.021.00114

BOWL TIGHTENING TORQUE	
F160-XD040/063/100	40 Nm
F160-XD160/250/400	60 Nm

INDICATOR TIGHTENING TORQUE	
Z30/Z31/Z32/Z33	90 Nm

### Installation

Make sure that the filter is connected in the correct IN-OUT flow direction (shown by an arrow on the filter head).

The filter housing should be preferably mounted with the bowl downward; the filter head should be properly secured using the threaded fixing holes on the filter head; verify that no tension is present on the filter after mounting.

Make sure that enough space is available for element replacement and that the clogging indicator is in a easily viewable position. If an electrical indicator is used, make sure that it is properly wired.

Never run the system without a filter element fitted. We recommend the stocking of a spare FILTREC filter element for timely replacement when required.

### Operation

Make sure that the filter works within the conditions of pressure, temperature and fluid compatibility given in the first page of this data sheet.

The filter element must be replaced as soon as the clogging indicator signals at working temperature (in cold start conditions, oil temperature lower than 30°C, a false alarm can be given due to oil viscosity).

If no clogging indicator is mounted, make sure that the filter element is replaced according to the system manufacturer's recommendations.

### WARNING

**Make sure that Personal Protective Equipment (PPE) is worn during installation and maintenance operation.**

### Disposal of filter elements

The used filter elements and the filter parts dirty of oil are classified as "Dangerous waste material": they must be disposed according to the local laws by authorized Companies.

### Maintenance

Before opening the filter housing, ensure that the system is switched off and there is no residual pressure in the filter.

Unscrew the bowl by turning it anticlockwise.

Remove the dirty filter element pulling it carefully; replace it with a FILTREC element, verifying the part number, particularly concerning the micron rating. When fitting the new element, open the plastic protection on the top and insert the element over the spigot in the filter head, then remove completely the plastic protection.

Clean carefully the bowl; check the gaskets conditions and replace if necessary; lubricate the threads and screw by hand the bowl in the filter head by turning it clockwise. Tighten at the recommended torque.

N.B. The used filter elements cannot be cleaned and re-used.

### PED Compliance

F160-XD filters conform to PED 97/23/CE norm, article 3 section 3, and so they can be used with fluids of group 2 (liquids with steam pressure < 0,5 bar at the maximum allowable temperature, article 3, section 1.1(b) – sub-section II).

